
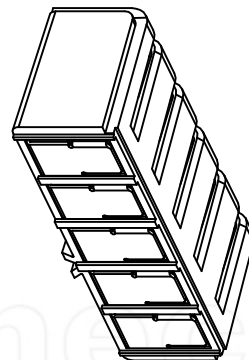


RoHS
Compliant

SYMBOL	REVISION	APPROVAL	DATE

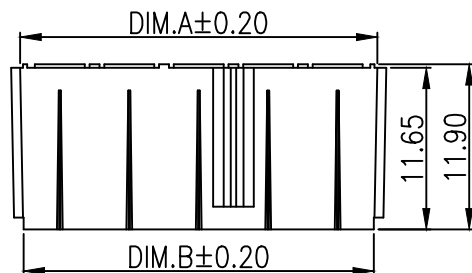

备注:

1. 产品规格:

1-1. 额定电压: 30V

1-2. 额定电流: 10A

1-3. 耐电压: 1000V AC MIN.

1-4. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX
AFTER 3000 CYCLES

1-5. 绝缘电阻: 1000MΩ MIN






1-6. 工作温度: -25℃ TO +80℃

2. 材质:


2.1 胶芯: PA9T UL94V-0/LCP BLACK

2.2 端子: 磷铜, 镍底, GOLD

3. 所用材质须符合RoHS要求

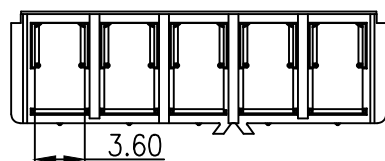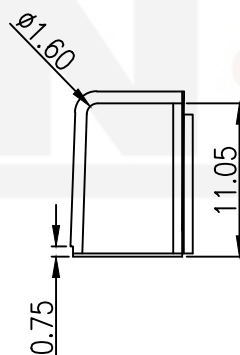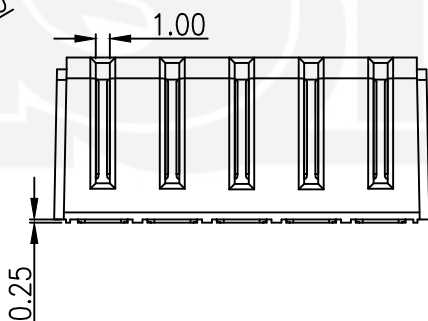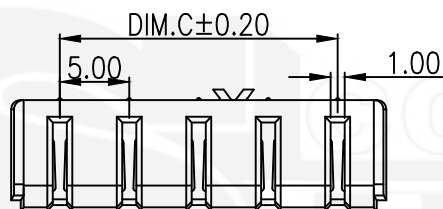

PART NUMBER	PIN	Dim.A	Dim.B	Dim.C
SYCZF01P2CSMT	02pin	10.70	10.20	5.00
SYCZF01P3CSMT	03pin	15.70	15.20	10.00
SYCZF01P4CSMT	04pin	20.70	20.20	15.00
SYCZF01P5CSMT	05pin	25.70	25.20	20.00

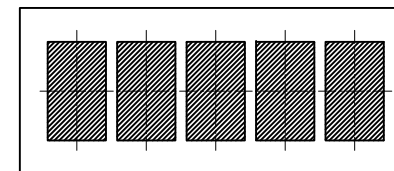

RECOMMENDED P.C. BOARD LAYOUT

SIN·YIN
信音达®

东莞市信音电子科技有限公司

DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME		CONNECTOR		DRAWING	X. L. SU	DWG. No.	
PART NO.		SYCZF01CSMT系列		CHECK	X. CHEN	REV.	A1
	UNIT:	TOLERANCE	ANGLE	APPROVAL		DATE	12-10-2023
	mm	OTHERWISE	0° ±3°	SCALE	3:1	PAGE	1 OF 1