
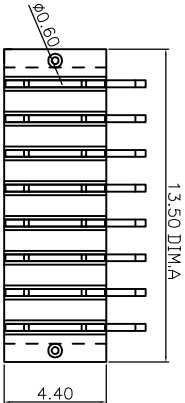
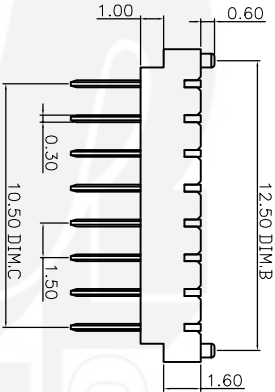



RoHS
Compliant



Recommended P.C.B Layout
Layout Tolerance=+/-0.05mm

B		A	
SYMBOL	REVISION	APPROVAL	DATE

Material
Insulator:Nylon 9T(UL94V-0)
Contact:C2680
Contact Plated:Gold over Nickel or Tin
Specification
Current Rating:3A/PIN
Instant Current:5A/PIN
Contact Resistance:30mΩ
Insulation Resistance:100M Ω
Dielectric Voltage:500V
Operating Temperature:-40° ~105°

No. of Pins	Dimension		
	DIM.A	DIM.B	DIM.C
02	4.50	3.50	1.50
03	6.00	5.00	3.00
04	7.50	6.50	4.50
05	9.00	8.00	6.00
06	10.50	9.50	7.50
07	12.00	11.00	9.00
08	13.50	12.50	10.50
09	15.00	14.00	12.00
10	16.50	15.50	13.50
11	18.00	17.00	15.00
12	19.50	18.50	16.50
13	21.00	20.00	18.00
14	22.50	21.50	19.50
15	24.00	23.00	21.00
16	25.50	24.50	22.50



东莞市信音电子科技有限公司
DONGGUAN XINYIN ELECTRONIC TECHNOLOGY CO., LTD.

PART NAME	1.5间距90度公座系列	DRAWING	X. L. SU	DWG. No.
PART NO.	SYCAM1501PxxR4	CHECK	X. CHEN	REV.
UNIT:	mm	ANGLE	3° ±3°	DATE
TOLERANCE	OTHERWISE	SCALE	3:1	PAGE
X.XX ±0.15 X.X' ±0.5' X.XX ±0.10 X.XX ±0.5' X.XX ±0.05 X.XX ±0.05' X.XX ±0.05 X.XX ±0.05' X.XX ±0.05 X.XX ±0.05'				
1 OF 1				